



FLIR GF320

- Real-time Infrared Gas Detection: Improved High Sensitivity Mode
- Built-in Video Recording, Digital Camera, Safety Laser
- Embedded GPS Data
- Fully Calibrated for Temperature Measurement Applications
- Automatic (One-Touch) and Manual Thermal Focus w/ 8 to 1 Continuous Digital Zoom
- High Resolution (800 x 480), Tiltable Viewfinder
- User-inspired Ergonomics: Rotating Handle, Direct Access Buttons
- High Contrast Color LCD




Real-time Infrared Gas Detection: Improved High Sensitivity Mode

Show gas leaks to co-workers, supervisors, or safety officers quickly and easily. Scan large, hard-to-reach, or dangerous areas rapidly and from safe distances. The improved High Sensitivity Mode (HSM) and noise reduction filter, plus new user-selectable color palettes produce sharp thermal images, downloadable video and reports!



reduction filter, plus new user-selectable color palettes produce sharp thermal images, downloadable video and reports!

mechanical equipment. Embedded GPS data allow you to “mimic the set-up” of precise locations where portably environmental monitors detect non-compliance. Work smarter, work safer.

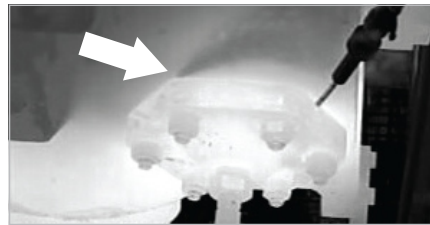

The sniffer (right) is detecting gas but unable to trace its source, whereas this thermal image shows the leak source clearly on the left.

Built-in video recording, digital camera, safety laser — Store thermal and/or visible video to MPEG4/H.264 standard SD memory cards, making it easy to share output or download to a PC. Use the new playback feature to view in the field – or plug into a TV or monitor back in the shop. The 3.2 mega pixel visible camera features auto focus and two high performance video lamps for illuminating dark areas, while the button-activated laser pointer helps you point out problematic leaks safely and easily.




Automatic (One-Touch) and Manual Thermal Focus w/ 8 to 1 Continuous Digital Zoom — A sharp thermal image – or video – pinpointing the source of a gas leak is the ideal output for repair crews. Whether you prefer one-touch automatic focusing or turning the lens with your fingers, the new GF320 helps you deliver the perfect picture. A powerful 8 to 1 digital zoom also



lets you zero-in on far-away or dangerous targets without compromising worker safety.

Onscreen Temperature Measurement and GPS Data — A wide temperature range (-40 to +350°C or -40 to +662°F) and improved thermal sensitivity (<25mK), the new GF 320 gives you the power to dial-in your “scene temperature” with the new user-inspired, direct-access “temperature range” button. This sharpens thermal image clarity, but also helps you see flare temperatures or record “hot spots” (i.e. potential failures) in all types of electro-

Tiltable, Flip-out 4.3” High Contrast Color LCD — Based on extensive end-user feedback, the new color LCD delivers a bright and vivid image in a widescreen format. It “flips-out” of the camera housing and then swivels and tilts to help you view targets more safely from any angle – helping to avoid eye strain when using the camera for extended periods of time.

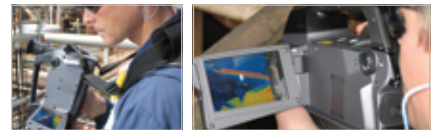

High Resolution (800 x 480), Tiltable Viewfinder — Use of a viewfinder is sometimes preferred, such as in extreme daylight. When needed, the GF 320’s new viewfinder is high quality, high



resolution and highly ergonomic – improving your safety and performance.



User-inspired Ergonomics: Rotating Handle, Direct Access Buttons

Designed from the end-user’s perspective, the new FLIR GF320 offers advanced ergonomics to improve worker safety and individual performance, not to mention reducing back and arm strain. The user interface is both smart and intuitive: it even allows you to customize your own direct access buttons to the features you use most!




FLIR GF320 Specifications

| Imaging and Optical Data | |
|---|--|
| Field of view/min focus distance | 24° x 18° / 0.3 m (1.0 ft.) |
| Lens identification | Automatic |
| F-number | 1.5 |
| Thermal sensitivity/NETD | <25 mK @ +30°C (+86°F) |
| Focus | Automatic (one touch) or manual (electric or on the lens) |
| Zoom | 1–8× continuous, digital zoom |
| Digital image enhancement | Noise reduction filter, scene based NUC, High Sensitivity Mode (HSM) |
| Focal Plane Array (FPA) / Spectral range | Cooled InSb / 3–5 μm |
| IR resolution | 320 × 240 pixels |
| Sensor cooling | Stirling Microcooler (FLIR MC-3) |
| Electronics and Data Rate | |
| Full frame rate | 60 Hz |
| Image Presentation | |
| Display | Built-in widescreen, 4.3 in. LCD, 800 × 480 pixels |
| Viewfinder | Built-in, tiltable OLED, 800 × 480 pixels |
| Automatic image adjustment | Continuous/manual; linear or histogram based |
| Manual image adjustment | Level/span |
| Image modes | IR-image, visual image, High Sensitivity Mode (HSM) |
| Measurement | |
| Temperature range | –40 to +350°C (–40 to +662°F) |
| Accuracy | ±1°C (±1.8°F) for temperature range (0 to +100°C, +32 to +212°F) or ±2% of reading for temperature range (>+100°C, >+212°F) |
| Measurement Analysis | |
| Spotmeter | 3 |
| Area | 1 box |
| Profile | 1 live line (horizontal or vertical) |
| Difference temperature | Delta temperature between measurement functions or reference temperature |
| Reference temperature | Manually set or captured from any measurement function |
| Emissivity correction | Variable from 0.01 to 1.0 or selected from editable materials list |
| Reflected apparent temperature correction | Automatic, based on input of reflected temperature |
| Measurement corrections | Reflected temperature, distance, atmospheric transmission, humidity, external optics |
| Set-up | |
| Menu commands | Level & span, Auto adjust continuous/manual/semi-automatic, Zoom, Palette, Start/stop recording, Store image, Playback/recall image |
| Set-up commands | 1 programmable button, local adaptation of units, language, date & time formats |
| Web interface | Admin camera setup and viewing IR images |
| Storage of images | |
| Image storage type | Removable SD or SDHC Memory Card, two card slots |
| Image storage capacity | > 1200 images (JPEG) with post process capability on memory card |
| Image storage mode | IR/visual images. Visual image can automatically be associated with corresponding IR image |
| Periodic image storage | Every 10 seconds up to 24 hours |
| File formats | Standard JPEG, 14 bit measurement data included |
| GPS | Location data automatically added to every image from built-in GPS |
| Video Recording and Streaming | |
| Non radiometric IR-video recording | MPEG/H.264 (60 minutes/clip) to memory card Visual image can automatically be associated with corresponding recording of non-radiometric IR video |
| Non radiometric IR-video streaming | RTP/H.264 |
| Digital Camera | |
| Built-in digital camera | 3.2 Mpixel, auto focus, and two video lamps |
| Digital camera video recording | MPEG4/H.264 (25 minutes/clip) to memory card |
| Laser Pointer | |
| Laser | Activated by dedicated button |
| Data Communication Interfaces | |
| USB | USB-A: Connect external USB device (e.g. memory stick) USB Mini-B: Data transfer to and from PC |
| USB, standard | USB Mini-B: 2.0 High Speed |
| Video | HDMI (image) |
| Power System | |
| Battery type / voltage | Rechargeable Li Ion battery / 7.2 V |
| Battery capacity | 4.4Ah |
| Battery operating time | > 3 hours at 25°C (+68°F) and typical use |
| Charging system | In camera (AC adapter or 12 V from a vehicle) or 2 bay charger |
| External power operation | AC adapter 90–260 VAC, 50/60 Hz or 12 V from a vehicle (cable with standard plug, optional) |
| Power | 8 W typically |
| Start-up time | < 5 min. @ 25°C (+77°F) |

| Environmental Data | |
|---------------------------------------|---|
| Operating temperature range | –20°C to +50°C (–4°F to +122°F) |
| Storage temperature range | –30°C to +60°C (–22°F to +140°F) |
| Humidity (operating and storage) | IEC 68-2-30/24 h 95% relative humidity +25°C to +40°C (+77°F to +104°F) (2 cycl) |
| EMC | |
| | EN61000-6-3 (Emission) |
| | EN61000-6-2 (Immunity) |
| | FCC 47 CFR Part 15 class B (Emission) |
| | EN 61 000-4-8, L5 |
| | EN/UL/CSA 60950-1 |
| Physical Data | |
| Encapsulation | IP 54 (IEC 60529) |
| Bump | 25 g (IEC 60068-2-29) |
| Vibration | 2 g (IEC 60068-2-6) |
| Physical Data | |
| Camera weight, incl. lens and battery | 2.48 kg (5.47 lb.) |
| Cameras size, incl. lens (L × W × H) | 306 × 169 × 161 mm (12.0 × 6.7 × 6.3 in.) |
| Tripod mounting | Standard, 1/4"-20 |

| Scope of Delivery | |
|--|--|
| Packaging / Contents | |
| Batteries | 2 ea. (1 of the batteries inside camera) |
| Battery charger | FLIR QuickReport™ PC software CD-ROM |
| | FLIR VideoReport™ PC software CD-ROM |
| Hard transport case | |
| HDMI-DVI cable | |
| HDMI-HDMI cable | |
| Infrared camera with Lens | |
| Lens cap (2 ea.) | |
| Lens cap (mounted on lens) | |
| Memory card | |
| Memory card adapter | |
| Power supply | |
| Power supply cable | |
| Printed Getting Started Guide | |
| Shoulder strap | |
| Strap for lens cap, 2 ea. | |
| System Calibration Certificate | |
| USB cable | |
| User documentation CD-ROM | |
| Warranty extension card or Registration card | |

| Accessory Optics | |
|------------------------|--|
| Lens MWB 24°, f=23mm | |
| Lens MWB 14.5°, f=38mm | |
| Lens MWB 6°, f=92mm | |

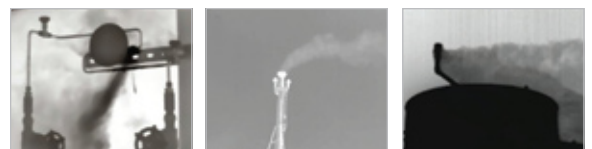

1 800 464 6372 | www.goinfrared.com/see
1 978 901 8000

All specifications are subject to change without notice. All images and content are for illustration purposes only.
Copyright © 2009 FLIR Systems, Inc. All rights reserved including the right of reproduction in whole or in part in any form. 1051209PL DATE: 05/20/09 1:00PM

